


NON RISING STEM GATE VALVE

Class 125

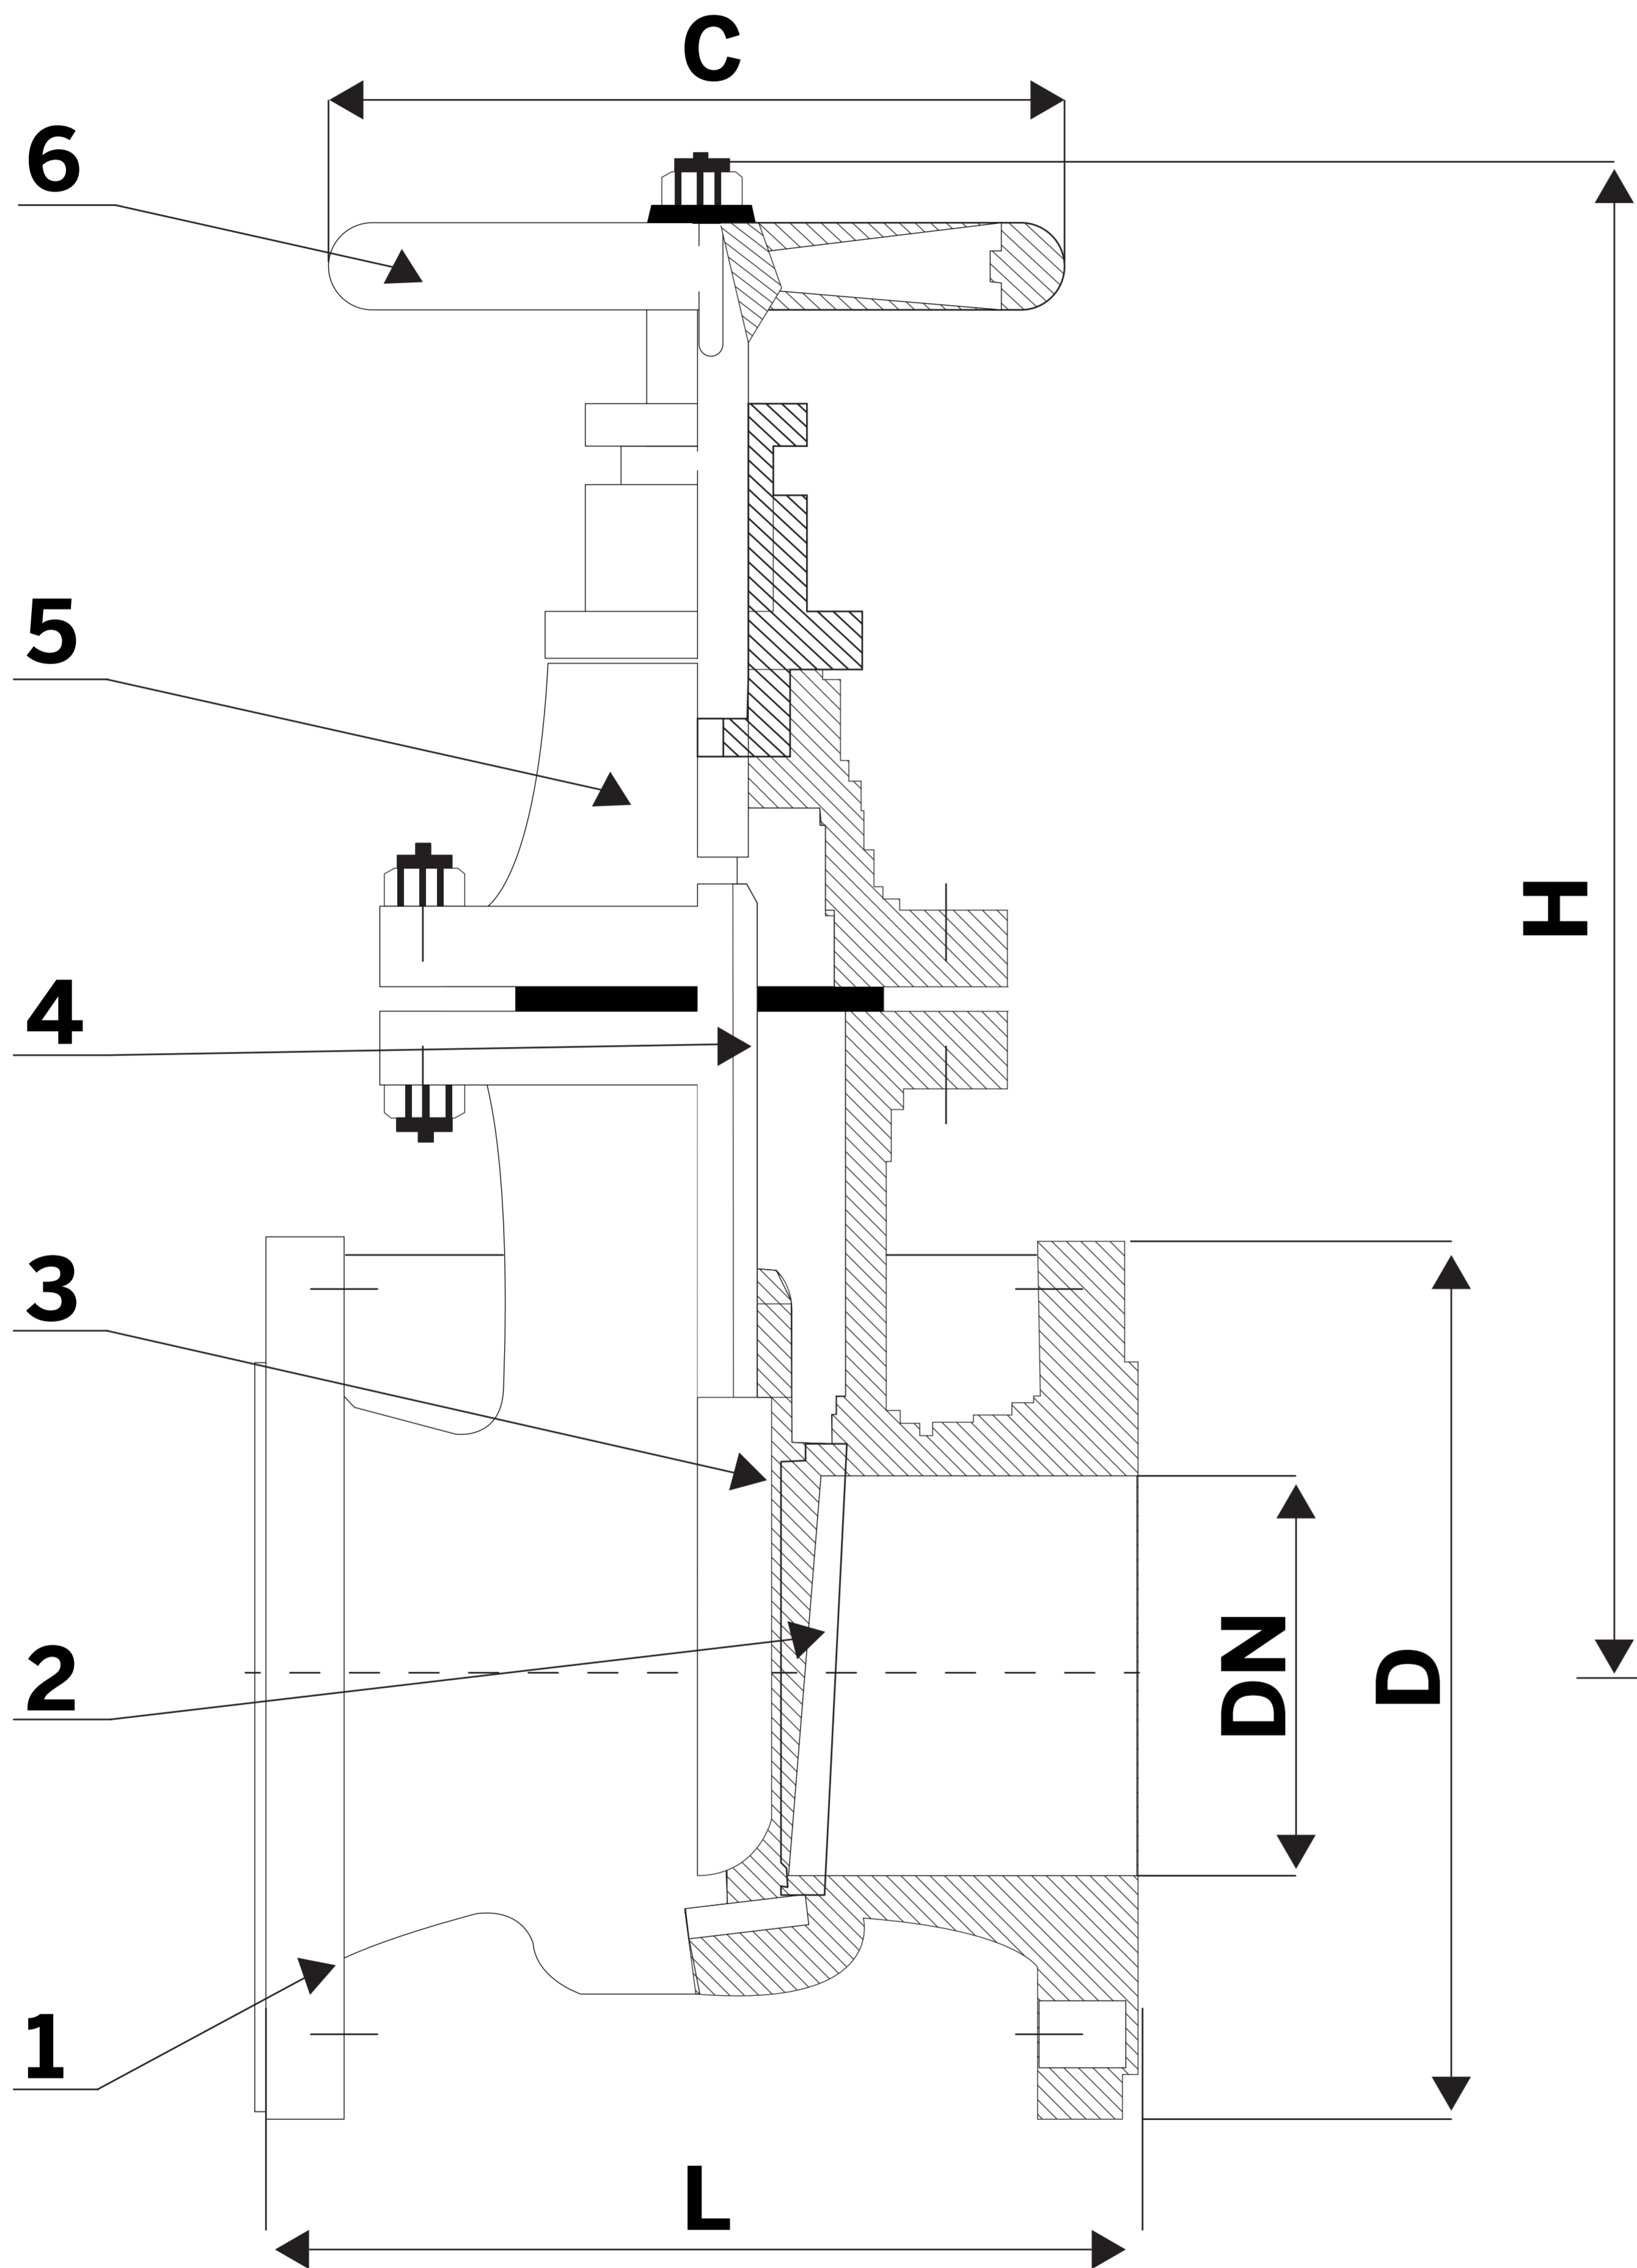

PART MATERIAL

1	Body	Cast Iron
2	Seat	Brass
3	Wedge	Cast Iron
4	Stem	SS410
5	Bonnet	Cast Iron
6	Handwheel	Cast Iron

TECHNICAL REQUIEREMENT

Face to face:	ANSI B16.10
Flange ends:	ASME B16.5
Medium:	Water, Oil, etc

TEST

Working Pressure	125PSI
Shell pressure	300PSI
Seat pressure	200PSI

DIMENSION

UNIT: mm

DN	L	H	C	D	K
1 1/2"	165	285	105	127	98.5
2"	178	304	170	152	120.5
2 1/2"	190	327	170	178	139.5
3"	203	355	190	191	152.5
4"	229	393	190	229	190.5
5"	254	438	235	254	216
6"	267	485	235	279	241.5
8"	292	657	285	343	298.5
10"	330	727	340	406	362
12"	356	825	380	483	432
14"	381	939	450	533	476
16"	406	1060	520	597	539.5

WWW.VANECO.COM.PE

Email: ventas@vaneco.com.pe

Oficina: Av. Andrés Razuri 207 Urb. Maranga San Miguel

Almacén Principal: Avenida Nicolas Ayllón 2635 – Interior C3

Central telefónica: (511) 5170130  948544608